Installation Guide

Case components

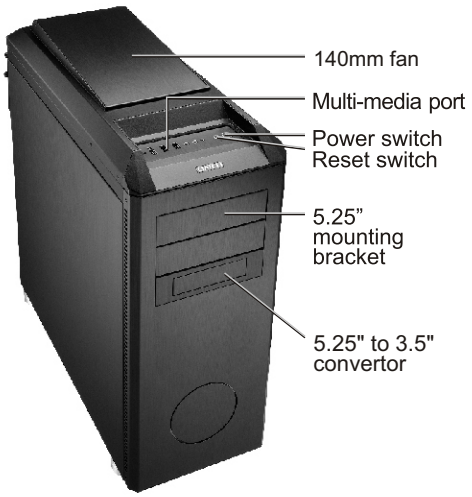

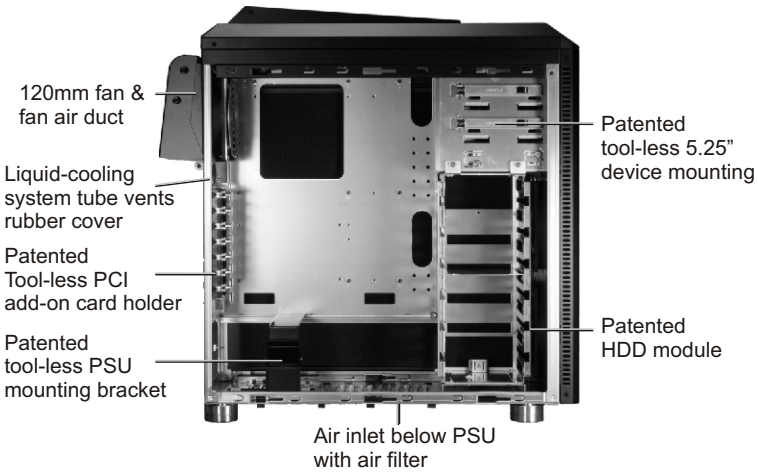
120mm fan & fan air duct
Liquid-cooling system tube vents rubber cover
Patented Tool-less PCI add-on card holder
Patented tool-less PSU mounting bracket
Patented tool-less 5.25” device mounting
Patented HDD module
Air inlet below PSU with air filter

Hardware list

* Extra quantities are spare parts.

Buzzer (1)	Cable tie (2)	Screw (12) spare parts	Rubber ring(24) for HDD mounting
Screw (4) for power supply mounting	Bracket(1) for power supply mounting	Fan air duct (1) for fan mount	Thumb screw(24) for HDD mounting
USB3.0 to USB2.0 convertor (1)	Longer vision thumb screw(3) for mother board mount	Shorter vision thumb screw(6) for mother board mount	PCI bracket (1)

Side panels installation



Remove four thumb screws.



Slide the panel backward to release.

Remove front panel

Pull the front panel toward yourself.

Accessing fan filter

Remove four thumb screws.



Press the handle to release the washable air filter.

Remove the mounting bezel

Press the right and left side of the bezel to remove.

ODD installation

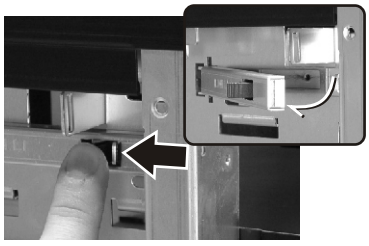

Press plastic handle to release the mounting bracket.



Push the ODD into the 5.25” rack, close the bracket to secare the ODD

Removable top panel

Left the top cover to remove.

Motherboard installation

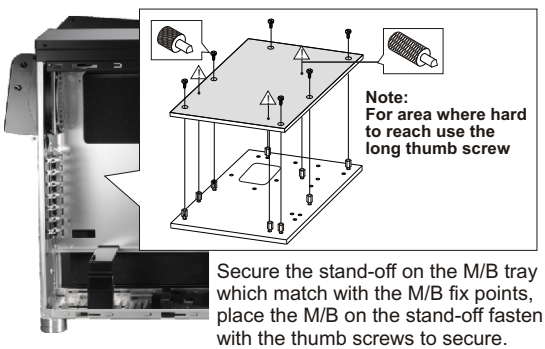

Secure the stand-off on the M/B tray which match with the M/B fix points, place the M/B on the stand-off fasten with the thumb screws to secure.

Hard disk installation guide

Fasten four screws to the HDD with anti-vibration rubber rings.



Slide the HDD into the HDD cage



Close the gate to secure the HDD.

PSU installation



Place the PSU on the stand, and push again to the rear panel.



Place the PSU bracket into according slot as shown.



Lock the PSU bracket to secure the PSU.
* For transportation, please use screws to secure the PSU

Accessing filter

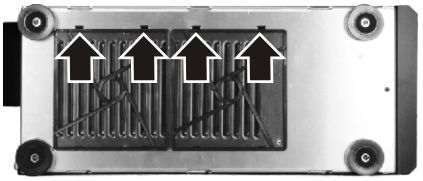



Press the handle to release the washable air filter.

Fan air duct installation

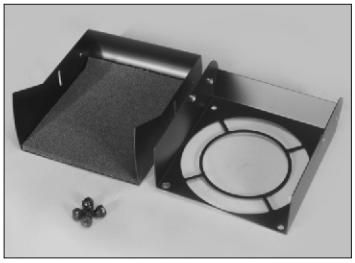

Remove four thumb screws.

Install air duct frame on fan with four 5x10 screws.

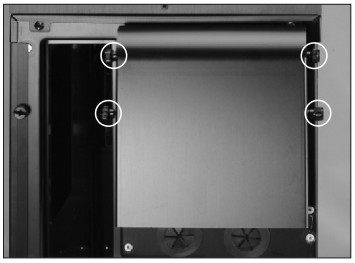

Place the fan air duct into proper location, fasten four thumb screws.



Loose the thumb screws in order to adjust the angle .

PCI Add-on card installation



Open the aluminum latch to remove the PCI slot bracket.



Push the card into the PCI slot, close the aluminum latch to secure the card.



Finish.

Front panel cable installation guide

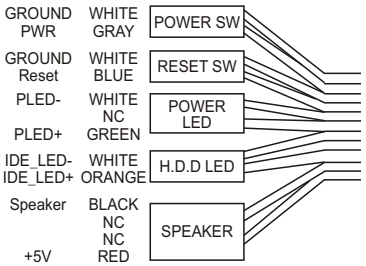

I/O port installation

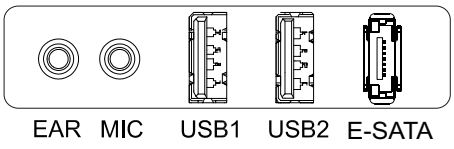

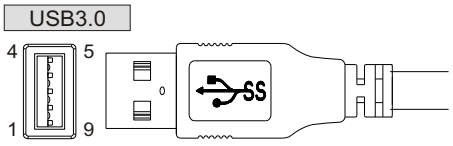

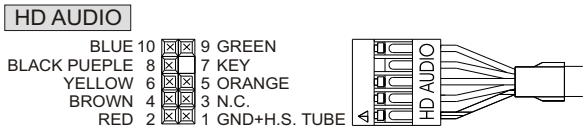

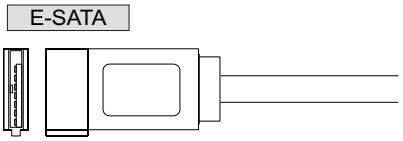

PCI bracket installation

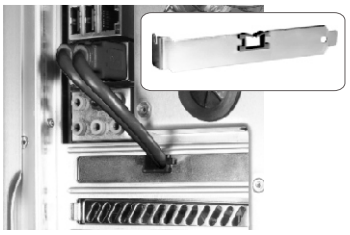

Access to rear I/O port.

USB3.0 to USB2.0 convertor